



CW-SYS to LA-MSWDCBB

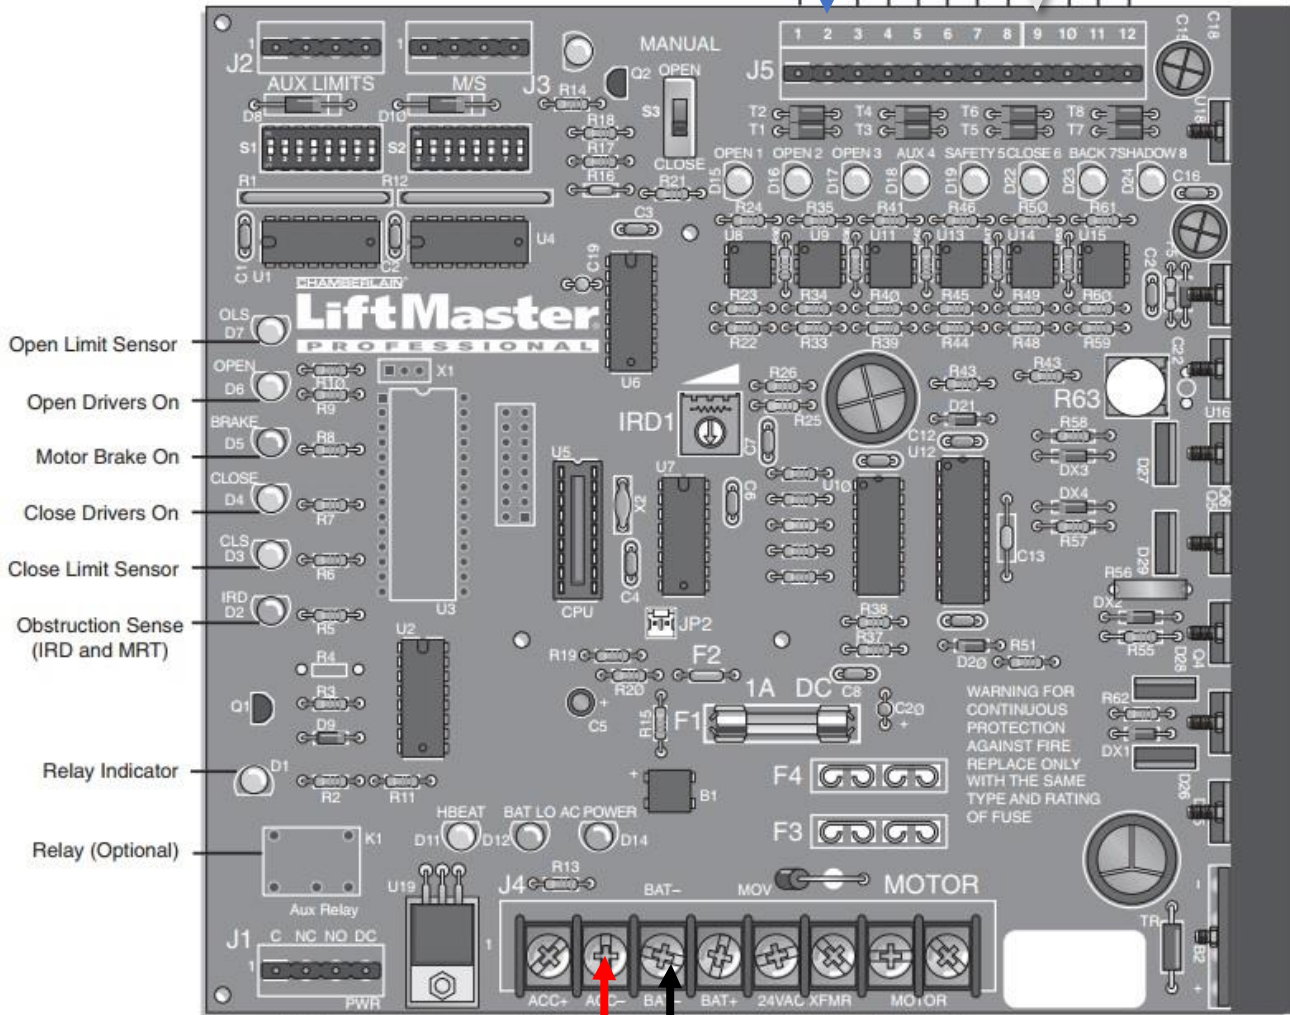

- Open Limit Sensor
- Open Drivers On
- Motor Brake On
- Close Drivers On
- Close Limit Sensor
- Obstruction Sense (IRD and MRT)
- Relay Indicator
- Relay (Optional)

K1 Relay Terminals (Optional): ACC+, ACC-, BAT+, BAT+, 24VAC XFMR, MOTOR

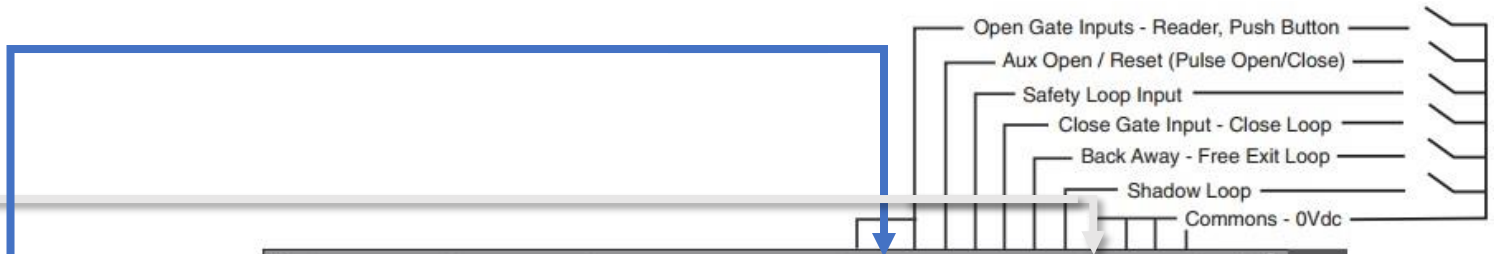

- 1 to ACC +
- 2 to ACC -
- 4 to 9, 10, 11, or 12
- 5 to 1, 2, or 3

If this is a solar application, you will need to compensate for the 25mA standby current of the integrator.